



NOTIFICATION # 410090360 DUE: 9/10/19

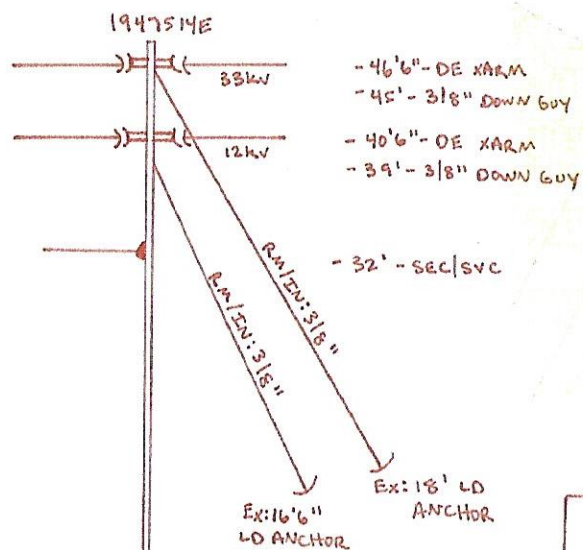

*AS DESIGNED
*HARD SET POLE
*HELICOPTER SET REQUIRED

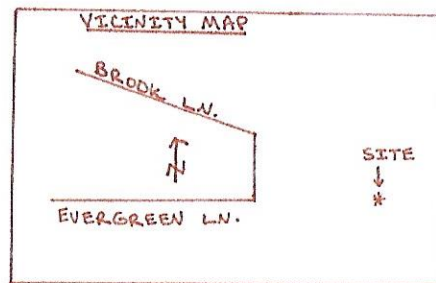

RM: 1947514E
RM: 1-50' CLASS-4 WC POLE
RM: 12- GLASS INS. (L235kV)
RM: 2-10' DBL WOOD VB XARM
RM: 1-166 ROLLER
RM: 1-3/8" DOWN GUY (L22.5kV)
RM: 1-3/8" DOWN GUY (>22.5kV)

IN: 1947514E
IN: 1-55' CLASS-4 DF TB POLE
IN: 6- POLY DE INS (33kV)
IN: 6- POLY POST PIN INS. (L33kV)
IN: 6- POLY OE INS (12kV)
IN: 6- POLY POST PIN INS. (12kV)
IN: 2- 10' DBL COMPOSITE DE XARM
IN: 1-166 ROLLER
IN: 1- 1/0 SEC PREFORM
IN: 1- #4 SVC PREFORM
IN: 1- 3/8" DOWN GUY (L22.5kV)
IN: 1- 3/8" DOWN GUY (>22.5kV)
*HARD SET POLE
*HELICOPTER SET
*TRANSFER SECONDARY

CIRCUIT CODE
16244 SHAKE 33kV
ARROWHEAD SUB A1

16839 SQUINT 12kV
ARROWHEAD SUB B1

GPS COORDINATES			
N	34.273320		
W	-117.208098		



NOT TO SCALE

TLM DATA	SIZE	KVA	# CUST	% LOAD
EXIST	N/A	N/A	N/A	N/A
PROP	N/A	N/A	N/A	N/A

PROJECT REQUIREMENTS (Y/N)		DISTRICT 40 - ARROWHEAD		PLANNER STEVEN SYSAVATH	PHONE 760-909-0364	DESIGNER DANIEL E ALVIDREZ
EDISON EASEMENT REQUIRED	☐	PROJECT NO.	2712234	MSR NO.	N/A	PRODUCT 1 TO1571785-DH POLE REPLACEMENT
PWRD 88 REQUIRED	☐	CIRCUIT / VOLTAGE	SEE DETAIL	THOMAS GUIDE	N/A	STRUCTURE # 1947514E
PERMIT REQUIRED	☐	SUB / PG NO.	SEE DETAIL	CIRCUIT CODE	SEE DETAIL	NOTIFICATION # 410090360
PERMIT TYPE: BLANKET	☐	INVENTORY MAP	282-2238-1	J.P.A. NO.	N/A	PROPOSED CONSTRUCTION (LOCATION) EVERGREEN LN. LAKE ARROWHEAD
OUTAGE REQUIRED	☐	TRAVEL TIME: 60				
TRAFFIC CONTROL REQUIRED	☐	PED. TRAFFIC CONTROL REQ'D	☐	CONVEYANCE LETTER REQ'D	☐	ENVIRON. SCREENING REQ'D
CSD 140 (TLM) REQ'D	☐					
		TYPE	DATE	APPROVED BY	CHECKED BY	DRAWN BY
		SHEET	1	of	1	DESIGN/PROG. NO.

NOTES: *HEAVY LOADING CONSTRUCTION
*TRUCK IS NOT ACCESSIBLE
*TREE TRIMMING REQUIRED
*HARD SET POLE
*HELICOPTER SET REQUIRED